




# GLOBAL FLOOR

FLOORING SOLUTIONS FOR THE HOSPITALITY PROFESSIONAL

# HAVEN

Global Floor is a Recommended Vendor by Hilton! Check us out on Suppliers Connection at [suppliersconnection.hilton.com](https://suppliersconnection.hilton.com) under the LVT, ERT categories.

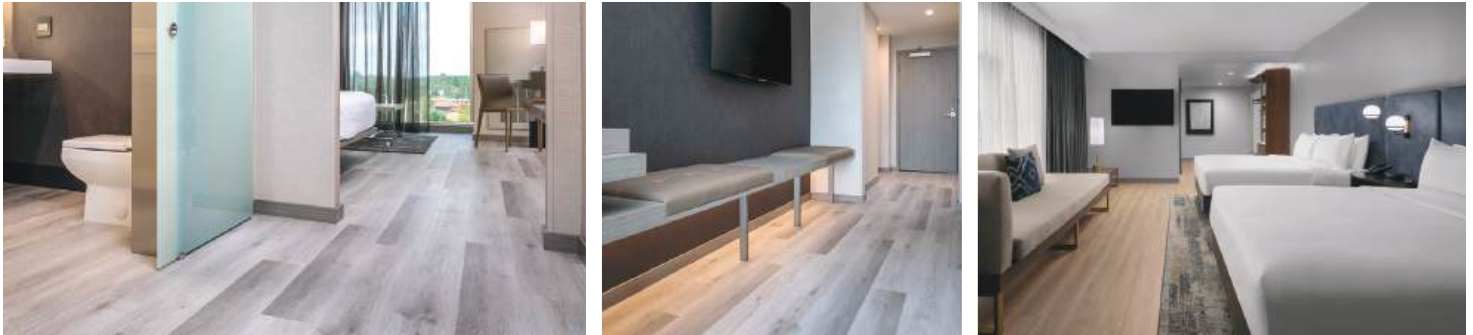

## All the features of wood, without all the features of wood

HAVEN has been engineered for the unique demands of the hospitality, multi-family, and student housing markets. HAVEN offers superior performance and long lasting beauty backed by a 20 year guestroom warranty. With its 20 mil UV-cured wear layer, HAVEN offers easy and cost-effective maintenance – simply sweep and damp mop as needed. HAVEN just clicks together, offering fast and easy installation, and its attached IXPE pad provides great sound reduction to the floors below. HAVEN is also water-resistant, allowing it to be used in bathrooms, often without the need for a transition strip.

US manufacturing allows us to be a dependable partner in the supply chain with 2 week lead times being typical.

### The company we keep:



**NEW**  
-FOR-  
**2026**

HAV-704 VALLEY FORGE	HAV-729 BIG SUR	HAV-741 CHOWAN	HAV-753 LINCOLN
HAV-705 SONOMA	HAV-731 ALAMANCE	HAV-742 FRANKLIN	HAV-754 MITCHELL
HAV-707 SHENANDOAH	HAV-732 GUILFORD	HAV-743 GRANVILLE	HAV-755 TYRELL
HAV-708 GETTYSBURG	HAV-733 DAVIE	HAV-750 HENDERSON	HAV-756 WARREN
HAV-717 LAUREL CANYON	HAV-734 ANSON	HAV-751 FORSYTHE	HAV-757 STOKES
HAV-721 HATTERAS	HAV-740 CATAWBA	HAV-752 IREDELL	HAV-758 NASH

# Waterproof Click Flooring SPECIFICATIONS

# HAVEN



## GENERAL INFORMATION

Classification	ASTM F-3261	Class 1, Type B, Backing Class B
Construction		5.0 mm Core 1.0 mm Attached IXPE Pad 0.5 mm Wear Layer
Plank Size		7.09" x 48.03"
Total Thickness	ASTM F-387	6.0 mm (1/4")
Wear Layer Thickness	ASTM F-410	0.5 mm / 20 mil
Per Carton		8 planks / 18.91 sq.ft.
Installation Method		Angle/Angle Locking System

## PERFORMANCE

Critical Radiant Flux	ASTM E-648	Class 1
Chemical Resistance	ASTM F-925	No change in 24 hours
Static Load Limit	ASTM F-970 (mod)	1,000 psi <0.005 in.
Heat Stability	ASTM F-1514	<8.0 Delta E
Light Stability	ASTM F-1515	<8.0 Delta E
Residual Indentation	ASTM F-1914	<0.007 in.
Dimensional Stability	ISO23999	Meets or exceeds F-3261
Coefficient of Friction	ASTM D-2047	Meets or exceeds 0.6
Impact Sound (IIC)	ASTM E-492	IIC 62
Airborne Sound (STC)	ASTM E-90	STC 52
Impact Sound	ASTM E-2179	ΔIIC 22

## WARRANTY & CERTIFICATIONS

Warranty	Commercial Manufacturing Residential Manufacturing	20 Years Lifetime
Certifications	Indoor Air Quality (IAQ) Low-Emitting Material Orthophthalate Free Proposition 65 Compliant	  

Listed on Hilton's Supplier Connection as a recommended vendor